

# Product Catalog

Gateways  
Controllers  
Sensors  
Configuration Utility




## Our Purpose

We believe that a data-driven world  
will make business more efficient,  
employees more engaged, and the  
environment more sustainable.



## Our Mission

# Connect 1 billion devices

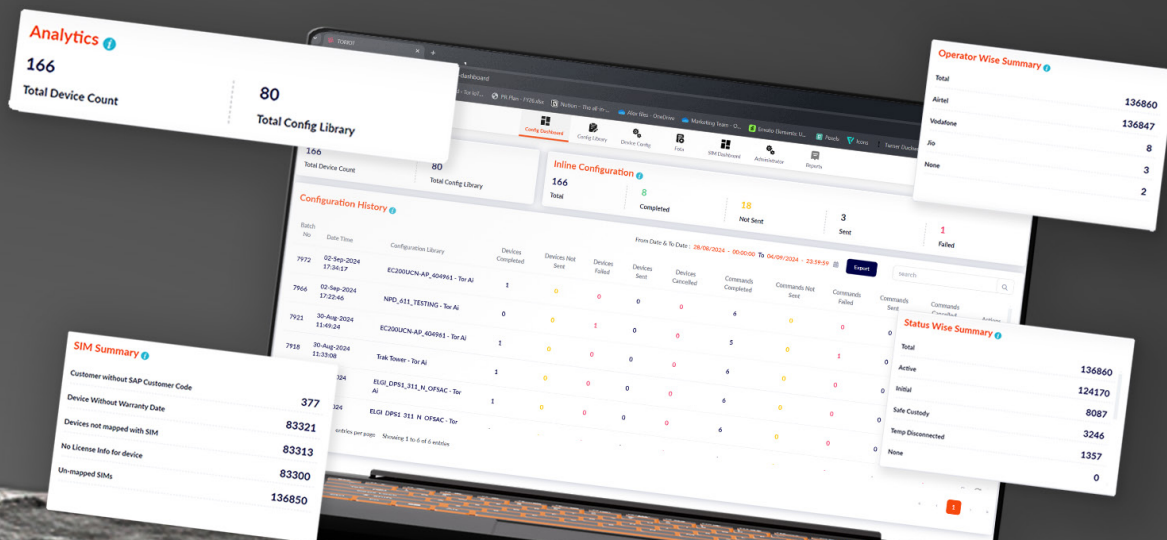



# Table of Contents

## Gateways

Designed for industrial environments, Tor.ai's gateways deliver reliable performance with features like multi-network connectivity (4G, Ethernet, BLE), advanced telemetry, and secure over-the-air updates. These gateways provide a comprehensive solution for monitoring, controlling, and optimizing equipment across distributed operations.

Tor Pluto	10
Tor Venus	12
Tor Jupiter	14
Tor Mars	16
Tor Locate	18

## Sensors

Our sensors provide comprehensive environmental and operational data, supporting advanced analytics for predictive maintenance. Designed for harsh industrial conditions, they ensure precise readings and are compatible with a wide range of equipment, enhancing your ability to manage and protect assets efficiently.

Tor Mercury	22
Fuel Sensor	24
Vibration Sensor	26





## Controller

Designed for flexibility, Tor.ai's controllers provide robust control over diverse equipment, supporting automated workflows and remote configuration. These controllers integrate effortlessly with our IoT platform, allowing for dynamic adjustments and optimized performance in real-time.

Tor Saturn	28
Tor Cygnus	32

## Energy Meter

Tor Titan	36
-----------	----

## Device Provisioning Utility

DPS Utility by Tor.ai offers centralized control over device provisioning, allowing for effortless activation, configuration, and tracking. It supports large-scale deployments, ensuring that all devices are correctly set up and ready for immediate use, enhancing overall operational efficiency.

Tor Apollo	42
------------	----



# Gateways

Robust type tested edge gateways

Unmatched performance even in harsh conditions



## Pluto Series Essential

### Pluto 313

4G LTE device with Modbus over RS485 support

### Pluto 411 | 412

4G LTE device with CAN support

### Pluto 714

4G LTE device

## Venus Series Advanced

### Venus 411 | 411 B

Advanced 4G LTE Cat1 device having RS485 and CAN support with battery back-up

### Venus 511 Venus 511 E1 | 511 E2

Advanced 4G LTE Cat1 device having RS485 and CAN support with battery back-up

## Jupiter Series Pro

### Jupiter 511

Industrial application device having 4G LTE Cat1 connectivity with flexible communication protocols support and flexible Inputs along with a high capacity battery backup

### Jupiter 611 | 611 G

Ethernet device having 4G LTE Cat1 connectivity with flexible communication protocol support along with a high capacity battery backup

### Jupiter 812

SNMP Protocol device for monitoring devices on IP networks





Sr No	New Names	RS 485	RS 232	Ethernet	CAN	BLE	Wifi	Hr Mtr	CI	AI
1	TOR Pluto 313	1	-	-	-	Y	-	-	-	-
2	TOR Pluto 411	1	-	-	1	Y	-	-	-	-
3	TOR Pluto 412	-	1	-	1	Y	-	-	-	2
4	Tor Pluto 714	-	-	-	-	Y	-	1	1	2
5	TOR Venus 411	-	-	-	1	Y	-	-	-	-
6	TOR Venus 411 B	-	-	-	1	Y	-	-	-	2
7	TOR Venus 511	1	-	-	1	Y	-	1	1	2
8	TOR Venus 511 E 1	1	-	-	1	Y	-	1	1	2
9	TOR Venus 511 E 2	1	-	-	1	Y	-	1	1	2
10	TOR Jupiter 511	1	-	-	1	Y	Y	1	1	8
11	TOR Jupiter 611	1	-	1	1	Y	-	-	-	-
12	TOR Jupiter 611 G	1	-	1	1	Y	Y	-	-	-
13	TOR Jupiter 812	1	-	1	-	Y	Y	-	-	-



DI	DO	4G	GPS	ACC	Int Memory	Flash M	Batt	Antenna
-	-	Y	Y	-	1000 (Strings)	-	-	External
-	-	Y	Y	-		64 MB	800mAH	Internal
4	1	Y	Y	Y		64 MB	800mAH	External
2	1	Y	Y	-		64 MB	-	Internal
2	1	Y	Y	-		64 MB	-	Internal
2	1	Y	Y	Y		64 MB	800mAH	Internal
2	1	Y	Y	-	1000 (Strings)	-	800mAH	External
2	1	Y	Y	-		64 MB	800mAH	External
2	1	Y	Y	-		64 MB	800mAH	Internal
8	4	-	-	-		64 MB	800mAH	External
-	-	Y	Y	-		64 MB	800mAH	External
-	-	Y	Y	-		4 MB	800mAH	External
-	-	-	-	-		4 MB	-	External



# Tor Pluto





Model Number	Pluto 313	Pluto 411	Pluto 412	Pluto 714
<b>Power Supply</b>				
Supply Voltage	12-30 V DC	14-90 V DC	9-30 V DC	14-30 V DC
Max Supply Voltage	30 V DC	90 V DC	30 V DC	30 V DC
Reverse Polarity Protection	0 to -30 V DC	0 to -90 V DC	0 to -30 V DC	0 to -30 V DC
Max Operating Current	<100 mA	<100 mA	<100 mA	<100 mA
Peak Operating Current	2A @network activities	2A @network activities	2A @network activities	2A @network activities
BackUp Battery	NA	800 mAH , Li-Ion 3.7 V	800 mAH , Li-Ion 3.7 V	NA
<b>Communication</b>				
Cellular	4G- LTE-FDD B1/B3/B5/B8 LTE-TDD B34/B38/B39/ B40/B41	4G- LTE-FDD B1/B3/B5/B8 LTE-TDD B34/B38/B39/ B40/B41	4G- LTE-FDD B1/B3/B5/B8 LTE-TDD B34/B38/B39/ B40/B41	4G- LTE-FDD B1/B3/B5/B8 LTE-TDD B34/B38/B39/ B40/B41
	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou, Galileo, QZSS	
Network Protocol	TCP/IP, Mqtt	TCP/IP, Mqtt	TCP/IP, Mqtt	TCP/IP, Mqtt
<b>Interfaces</b>				
CAN	NA	1	1	NA
RS232/485	1 (RS485)	1 (RS485)	1 (RS232)	NA
Digital Input	NA	NA	4 (12-30 V)	2 (0-30 V)
Digital output	NA	NA	1 (1A, 60V)	1 (1A, 60V)
Analogue Input	NA	NA	2 (0-30 V)	2 (0-15V) single wire
Counter Input (0-1000 Hz)	NA	NA	NA	1
Hour Meter	NA	NA	NA	1
GNSS Antenna	External	Internal	External	Internal
Cellular Antenna	ExternalGSM	Internal GSM	External GSM	Internal GSM
SIM	Micro	Micro	Micro	Micro
Memory	1000 strings	64 MB	64 MB	64 MB
<b>Bluetooth</b>				
Specification	BLE 4.2	BLE 4.2	BLE 4.2	BLE 4.2
<b>Additional Features</b>				
Configuration / FOTA	Web configuration	Web configuration	Web configuration	Web configuration
Sensors	NA	NA	Accelerometer	NA
<b>Physical Specification</b>				
Dimension	104 * 91 * 36 (L*W*H)	104 * 91 * 36 (L*W*H)	104 * 91 * 36 (L*W*H)	104 * 91 * 36 (L*W*H)
Harness	4 Pin	4 Pin	16 Pin	8 Pin
<b>Operating Environment</b>				
Operating Temperature	-40 to +85 deg C	-40 to +85 deg C	-40 to +85 deg C	-40 to +85 deg C
Operating Humidity	85 Rh	85 Rh	85 Rh	85 Rh
Vibration	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz
Enclosure Ingress Protection (IP)	IP 65	IP 65	IP 65	IP 67

# Tor Venus



**tor.ai**<sup>TM</sup>  
Venus

11-90V DC  
4G-LTE CAN  
RS485 BLE  
G-sensor  
IP 65

Made in India

CE

Model Number	Venus 411	Venus 411 B	Venus 511	Venus 511 E 1	Venus 511 E 2
<b>Power Supply</b>					
Supply Voltage	14-90 V DC	14-90 V DC	12-30 V DC	12-30 V DC	12-30 V DC
Max Supply Voltage	90 V DC	90 V DC	30 V DC	30 V DC	30 V DC
Reverse Polarity Protection	0 to -90 V DC	0 to -30 V DC	0 to -30 V DC	0 to -30 V DC	0 to -30 V DC
Max Operating Current	<100 mA	<100 mA	<100 mA	<100 mA	<100 mA
Peak Operating Current	2A @network activities	2A @network activities	2A @network activities	2A @network activities	2A @network activities
BackUp Battery	NA	800 mAH , Li-Ion 3.7 V	800 mAH , Li-Ion 3.7 V	800 mAH , Li-Ion 3.7 V	800 mAH , Li-Ion 3.7 V
<b>Communication</b>					
Cellular	4G- LTE-FDD B1/B3/B5/B8	4G- LTE-FDD B1/B3/B5/B8	4G- LTE-FDD B1/B3/B5/B8	4G- LTE-FDD B1/B3/B5/B8	4G- LTE-FDD B1/B3/B5/B8
	LTE-TDD B34/B38/B39/B40/B41	LTE-TDD B34/B38/B39/B40/B41	LTE-TDD B34/B38/B39/B40/B41	LTE-TDD B34/B38/B39/B40/B41	LTE-TDD B34/B38/B39/B40/B41
	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz	2G- GSM 900 MHz/1800 MHz
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou, Galileo, QZSS
Network Protocol	TCP/IP, Mqtt	TCP/IP, Mqtt	TCP/IP, Mqtt	TCP/IP, Mqtt	TCP/IP, Mqtt
<b>Interfaces</b>					
CAN	1	1	1	1	1
RS485	NA	NA	1	1	1
Digital Input	2 (0-90V)	2 (0-90V)	2 (0-30V)	2 (0-30V)	2 (0-30V)
Digital Output	1 (500mA, 60V)	1 (500mA, 60V)	1 (500mA, 60V)	1 (500mA, 60V)	1 (500mA, 60V)
Analogue Input	NA	2 (0-90V) single wire	2 (0-30V) single wire	2 (0-30V) single wire	2 (0-30V) single wire
Counter Input (0-1000 Hz)	NA	NA	1	1	1
Hour Meter	NA	NA	1	1	1
GNSS Antenna	Internal	Internal	External	External	Internal
Cellular Antenna	Internal GSM	Internal GSM	External GSM	External GSM	Internal GSM
SIM	Micro	Micro	Micro	Micro	Micro
Memory	64MB	64MB	1000 strings	64 MB	64 MB
<b>Bluetooth</b>					
Specification	BLE 4.2	BLE 4.2	BLE 4.2	BLE 4.2	BLE 4.2
<b>Additional Features</b>					
Configuration / FOTA	Web configuration	Web configuration	Web configuration	Web configuration	Web configuration
Sensors	NA	Accelerometer	NA	NA	NA
<b>Physical Specification</b>					
Dimension	120 * 115 * 35 (L*W*H)	120 * 115 * 35 (L*W*H)	120 * 115 * 35 (L*W*H)	120 * 115 * 35 (L*W*H)	120 * 115 * 35 (L*W*H)
Standard Harness	4 Pin	4 Pin	12 Pin	12 Pin	12 Pin
<b>Operating Environment</b>					
Operating Temperature	-40 to +85 deg C	-40 to +85 deg C	-40 to +85 deg C	-40 to +85 deg C	-40 to +85 deg C
Operating Humidity	85 Rh	85 Rh	85 Rh	85 Rh	85 Rh
Vibration	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz
Enclosure Ingress Protection (IP)	IP 65	IP 65	IP 65	IP 65	IP 65



# Tor Jupiter



Model Number	Jupiter 511	Jupiter 611	Jupiter 611 G	Jupiter 812
<b>Power Supply</b>				
Supply Voltage	12-30 V DC	12-30 V DC	12-30 V DC	12-30 V DC
Reverse Polarity Protection	0 to -30 V DC	0 to -30 V DC	0 to -30 V DC	0 to -30 V DC
Max Operating Current	<100 mA	<100 mA	<100 mA	<100 mA
Peak Operating Current	2A @network activities	2A @network activities	2A @network activities	2A @network activities
BackUp Battery	800 mAH , Li-Ion 3.7 V	800 mAH , Li-Ion 3.7 V	800 mAH , Li-Ion 3.7 V	NA
<b>Communication</b>				
Cellular	4G- LTE-FDD B1/B3/B5/B7/ B8/B20 LTE-TDD B38/B40/B41 WCDMA-B1/B5/B8 2G- GSM 900 MHz/1800 MHz	4G- LTE-FDD B1/B3/B5/B7/ B8/B20 LTE-TDD B38/B40/B41 WCDMA-B1/B5/B8 2G- GSM 900 MHz/1800 MHz	4G- LTE-FDD B1/B3/B5/B7/ B8/B20 LTE-TDD B38/B40/B41 WCDMA-B1/B5/B8 2G- GSM 900 MHz/1800 MHz	NA
WIFI	IEEE 802.11 Wireless network	NA	IEEE 802.11 Wireless network	IEEE 802.11 Wireless network
GNSS	GPS, GLONASS, BeiDou, Galileo, QZSS	GPS, GLONASS, BeiDou	GPS, GLONASS, BeiDou	NA
<b>Interfaces</b>				
Digital Input	8 (0-40 V)	0	0	0
Digital Output	4	0	0	0
Analogue Input	4 (0-30V) & 4 (4-20mA) single wire	0	0	0
CAN	1	1	1	0
RS485	1	1	1	1
Counter Input (0-1000 Hz)	2	NA	NA	NA
Hour Meter	1	NA	NA	NA
Ethernet	NA	1	1	1
GNSS Antenna	External	External	External	NA
Cellular Antenna	External GSM	External GSM	External GSM	NA
SIM	Micro	Micro	Micro	Micro
Memory	64 MB	64 MB	4 MB	4 MB
<b>Bluetooth</b>				
Specification	BLE 4.2	BLE 4.2	BLE 4.2	BLE 4.2
Supported peripherals	Fuel sensors, BLE Beacons	Fuel sensors, BLE Beacons	Fuel sensors, BLE Beacons	Fuel sensors, BLE Beacons
<b>Additional Features</b>				
Configuration / FOTA	Web configuration	Web configuration	Web configuration	NA
Sensors	Accelerometer	NA	NA	NA
<b>Physical Specification</b>				
Dimension	170 * 110 * 42 (L*W*H)	170 * 110 * 42 (L*W*H)	170 * 110 * 42 (L*W*H)	170 * 110 * 42 (L*W*H)
<b>Operating Environment</b>				
Operating Temperature	-10 to +70 deg C	-40 to +85 deg C	-10 to +70 deg C	-40 to +85 deg C
Operating Humidity	85 Rh	85 Rh	85 Rh	85 Rh
Vibration	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz	2g, 10-150 Hertz
Enclosure Ingress Protection (IP)	IP 65	NA	NA	NA

# Tor Mars





Model Number	Mars 712	Mars 713
<b>Power Supply</b>		
Supply Voltage	12-90 V DC	3*AA Battery
Max Supply Voltage	90 V DC	5 V DC
Reverse Polarity Protection	0 to -90 V DC	0 to -5 V DC
Max Operating Current	<100 mA	NA
Peak Operating Current	2A @network activities	NA
BackUp Battery	250 mAH , Li-Ion 3.7 V	Slabs
<b>Communication</b>		
Cellular	2G Quad-band GSM 850 / 900 / 1800 / 1900 MHz	2G Quad-band GSM 850 / 900 / 1800 / 1900 MHz
GNSS	GPS, GLONASS	Traingulation
Network Protocol	TCP/IP, Mqtt	Mqtt
<b>Interfaces</b>		
Digital Input	1	NA
Digital Output	1	NA
Analogue Input	1 (0-40 v)	NA
GNSS Antenna	Internal	NA
Cellular Antenna	Internal GSM	Internal GSM
SIM	Micro (1)	Nano (1)
Memory	200 records @1 min frequency	NA
<b>Additional Features</b>		
Configuration & FW update	FOTA	NA
<b>Physical Specification</b>		
Dimension	51 * 98 * 20 (LWH)	51 * 98 * 20 (LWH)
<b>Operating Environment</b>		
Operating Temperature	-10 to +70 deg C	0 to 40 deg C
Operating Humidity	85 Rh	NA
Vibration	2g, 10-150 Hertz	NA
Enclosure Ingress Protection (IP)	IP 65	85 Rh

# Tor Locate



**Model Number****Locate****Power Supply**

Supply Voltage	3x AA Batteries
Maximum Operating Current	<100mA
Low Power Operating Current	<1mA

**Communication**




Wireless Connectivity	GSM/GPRS
Location Tracking	Triangulation
SIM	Nano

**Interfaces**

Operating Temperature	-20 to +75deg C
Humidity	95 RH
Vibration	3g

# Sensors

Temperature, Fuel & Vibration

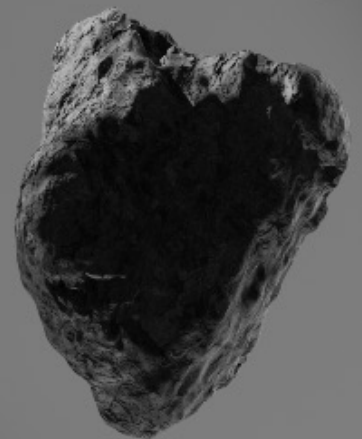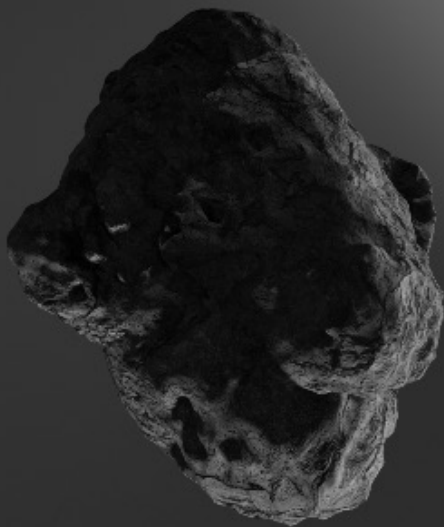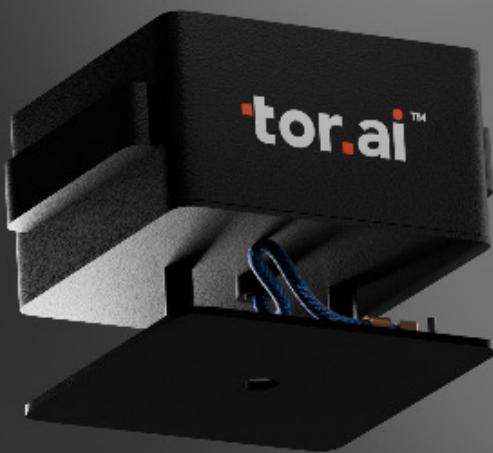



Tor Mercury  
**Temperature**

Tor Ceres  
**Fuel**

Tor Neptune  
**Vibration**



# Tor Mercury





**Suitable for a variety of  
bus bar trucking systems,  
panel deployments for  
distribution systems  
temperature monitoring  
applications**



#### **Configurability**

Mobile based utility to pair with Gateways



#### **Wireless Connectivity**

Seamlessly connect with Tor Gateways and other industrial controllers using the industry-standard BLE communication, integrate effortlessly with existing systems



#### **Built Tough. Built to Last**

The IP65-rated enclosure shields your device from dust, dirt, and water jets, ensuring it thrives in even the harshest environments

Temperature Measuring range	-40 to +240 °C
Temperature accuracy	± 0.1
Battery	2700 mAh, 2 x ER14505 batteries
Battery Life	15 years
Operating voltage	7.2V (nominal)
Dimensions	65 x 70 x 65 (L x B x H)
Communication	BLE 5.2, advertising mode
Communication range	50 meter
Ingress Protection	IP40
Attachment method	Adhesive for horizontal busbars, Extension clip

# Tor Ceres







**Tor Fuel Sensor is bluetooth enabled, high-precision capacitive fuel level sensor, which is used to monitor fuel consumption, refueling, draining and theft on all types of vehicles, as well as stationary tanks**



#### Configurability

Mobile based and web based utility to setup pairing, self pairing feature is also added which makes the configuration super easy



#### Communication

In addition to digital, frequency and analog output signals, BLE mode has been added to this sensor



#### Adoptability

The fuel monitoring sensor is easy to set up and perfectly interacts with monitoring systems of any make



#### Build to Last

Operating temperature range from -60/+85 °C. It comes with a embed-ed battery which can power your installation up to 3 years

Measurement error in the effective range	up to 1%
Operating modes	BLE
Output range	not less than 10 meters
Ingress Protection	IP69
Explosion proof mark	OEx ia IIB T6 X
Operating Temperature- ambient	-40 to +50 °C
Operating Temperature- extreme ambient	-40 to +85 °C
Dimension	90*90*(L+38)mm, where L is sensor length in mm
Battery life	5 years

# Tor Neptune





**Industrial application device, the vibration sensor is a cost-effective solution with high sensitivity, fast response, and superior performance**



#### Ease of Mounting

Magnetic base for ease of mounting and built to use in harsh industrial working conditions



#### Protection

Load dump protection as per ISO 7637-2 with IP 65 Enclosure



#### Interfaces

Lite Gateway with serial communication interfaces : RS 485/CAN/BLE



#### Condition-based monitoring

Enable your preventive maintenance to increased reliability, improved uptime. Remote & real-time monitoring system helps in achieving high operation efficiency


Sensing Tech	MEMS Based
Vibration Sensor	3-axis MEMS Sensor
Frequency Range	10Hz to 1.3kHz
Sampling Rate	6.66k per sample
Shock Tolerance	10,000g for 0.2ms
Linear Acceleration sensitivity	0.488mg/LSB ( $\pm 16G$ )
Resolution	16 bit
Data from sensor	3-axis acceleration & velocity RMS, Temperature
Temperature Sensor	Semiconductor sensor with max 0.2 °C accuracy over -40 °C to 100 °C range
RS-485	RTU connectivity on Modbus protocol

# Controller





# Tor Saturn

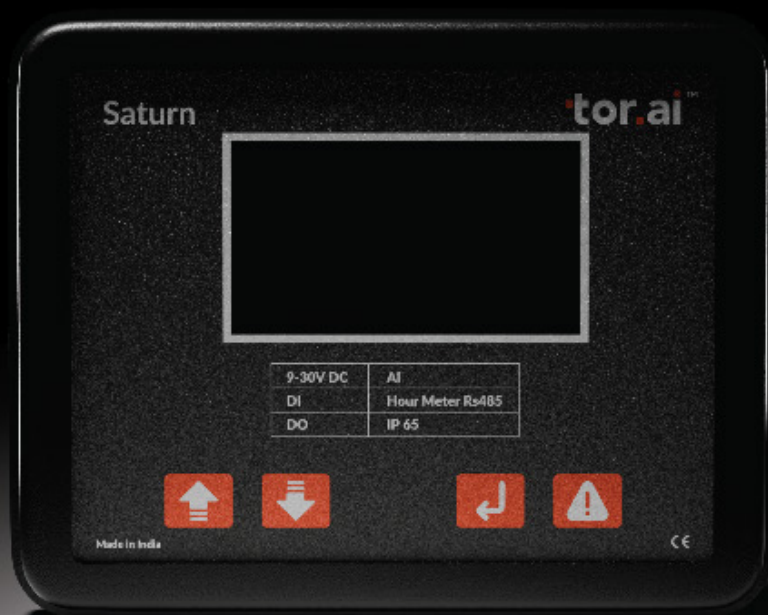



Model Number	Saturn 323
--------------	------------

### Power Supply

Supply Voltage	9-30 V DC
Max Supply Voltage	30 V DC
Reverse Polarity Protection	0 to -30 V DC
Max Operating Current	<100 mA

### Interfaces

Digital Input	4 (0-30V)
Digital output	8 (5A, 12V)
Analogue Input	3 (0-30V) single wire, 1 (4-20mA)
Analogue Output	2 (12V)
RS232/485	1
Counter Input (0-1000 Hz)	1
Hour Meter	1
LED Indication	NA

### Physical Specification

Dimension	158 * 126 * 42.50 (LWH)
-----------	-------------------------

### Operating Environment

Operating Temperature	-10 to +70 deg C
Operating Humidity	85 Rh
Vibration	2g, 10-150 Hertz
Enclosure Ingress Protection (IP)	IP 65 (Front), IP 20 (Back)

# Cygnus 901

Smart Edge Appliance



# Tor Cygnus



## Model Number Cygnus 901 Smart Edge Appliance

### Power Supply

Input Voltage	230V/50Hz AC
Output Voltage	5V/5A DC

### SDK

Operating System	Android 13
Processor	Qualcomm® QCM2290 quad-core ARM® Cortex®-A53@2.0 GHz 64-bit processor with built-in Adreno™ 702 GPU
Supported Programming Languages (for users to develop their own Applications)	C, C++, Python, Java, Node.js etc.
Flash Available for SDK	16GB(Standard) / 32GB(Optional)
RAM Available for SDK	2GB

### Network Protocols

Ethernet, MQTT, Modbus (RS485, 422), Modbus TCP/IP, Ethernet IP, BACnet, Profinet, OPCUA

### Interfaces

USB	USB 2.0 - 2nos.
Ethernet	RJ45 - 2nos.
Serial	RS485 - 2 Unit
HDMI	1 HDMI port
Audio	3.5 mm AUX to support Speaker & Mic
Antenna	3 Units External Antenna - (GSM, GPS, BLE/WIFI)
Cellular	4G
SIM Slot	Nano SIM - 1 unit
SD CARD Slot	Support upto 128GB
Location Services	GNSS/GPS
Wifi	IEEE 802.11 family of standards
Bluetooth Operation	BLE 5.0
led Indicators	Power & Network 4G(GSM/GPS)
Digital Inputs	4 nos : 0 to 30V
Analog Inputs	1 No. (16 bit) - 0 to 36V & Resistor 0 to 1K
Digital Output	4 Nos (Sink type wit 1A max current)
Power/ Reset Button	Available
RTC	Available

### Enclosure

Mounting	Din Rail / Table Top
Form Factor	115 X 52 x 150 mm (LxWxH)

# Meter




Titan





Model Number	Titan 211	Titan 212	Titan 311
<b>Electrical</b>			
Voltage Range	50V - 500V (AC 3 Phase 4 wire, 3 phase 3 wire)	50V - 500V (AC 3 Phase 4 wire, 3 phase 3 wire)	50V - 500V
Aux Power Supply range	65V - 450V AC/DC supply	65V - 450V AC/DC supply	65V - 450V AC/DC supply
Current Range	0.05A - 5.0A (20% Overload)	0.05A - 5.0A (20% Overload)	0.05A - 5.0A (20% Overload)
Frequency	45Hz - 65Hz	45Hz - 65Hz	45Hz - 65Hz
Accuracy Class	0.5S	0.5S	0.5S
Short time over current	200% for 10 Sec	200% for 10 Sec	200% for 10 Sec
<b>Compliance</b>			
Standards	IS 14697, IS 13779, IEC62052-11, IEC62053-22, IEC62053-23, IEC 61010, IEC 62053-31	IS 14697, IS 13779, IEC62052-11, IEC62053-22, IEC62053-23, IEC 61010, IEC 62053-31	IS 14697, IS 13779, IEC62052-11, IEC62053-22, IEC62053-23, IEC 61010, IEC 62053-31
<b>Mechanical</b>			
Dimensions (W*H*D)	96*96*41 mm	96*96*41 mm	96*96*41 mm
Weight	0.5Kg	0.5Kg	0.5Kg
Enclosure	Polycarbonate	Polycarbonate	Polycarbonate
Terminals	Plug In	Plug In	Plug In
Mounting	Panel Mounting, Din rail (Optional)	Panel Mounting, Din rail (Optional)	Panel Mounting, Din rail (Optional)
<b>Environmental</b>			
IP	IP54(front facia) ; IP 20 (at terminals)	IP54(front facia) ; IP 20 (at terminals)	IP54(front facia) ; IP 20 (at terminals)
Insulation	min 10 MOhm	min 10 MOhm	min 10 MOhm
Impulse withstand	Refer to standard		Refer to standard
Operating Temp	10 to 75 deg C	10 to 75 deg C	10 to 75 deg C
Storage Temp	0 to 85 deg C	0 to 85 deg C	0 to 85 deg C
Humidity	95% RH	95% RH	95% RH
<b>Communication</b>			
Modbus	RS 485	RS 485	RS 485
Baudrate	9600 to 115200 settable	9600 to 115200 settable	9600 to 115200 settable
WiFi	NA	IEEE 802.11 Wireless network	NA
BLE (Bluetooth Low Energy)	NA	BLE 5.0	NA
CT/VT	Configurable via RS485	Configurable via RS485	Configurable via RS485
<b>Interfaces</b>			
Analogue Input	NA	NA	NA
Digital Input	NA	NA	NA
Digital Output	NA	NA	NA
Counter Input (0-1000 Hz)	NA	NA	NA
Hour Meter	NA	NA	NA
<b>Display</b>			
Screen	NA	NA	Colour TFT 3.5 inch (320*480)
<b>Additional Features</b>			
Transient Analysis over WIFI	NA	NA	NA
Titan mobile app	NA	Android and iOS	NA

Model Number	Titan 312	Titan 313	Titan 411
<b>Electrical</b>			
Voltage Range	50V - 500V	50V - 500V	50V - 500V
Aux Power Supply range	65V - 450V AC/DC supply	65V - 450V AC/DC supply	65V - 450V AC/DC supply
Current Range	0.05A - 5.0A (20% Overload)	0.05A - 5.0A (20% Overload)	0.05A - 5.0A (20% Overload)
Frequency	45Hz - 65Hz	45Hz - 65Hz	45Hz - 65Hz
Accuracy Class	0.5S	0.5S	0.5S
Short time over current	200% for 10 Sec	200% for 10 Sec	200% for 10 Sec
<b>Compliance</b>			
Standards	IS 14697, IS 13779, IEC62052-11, IEC62053-22, IEC62053-23, IEC 61010, IEC 62053-31	IS 14697, IS 13779, IEC62052-11, IEC62053-22, IEC62053-23, IEC 61010, IEC 62053-31	IS 14697, IS 13779, IEC62052-11, IEC62053-22, IEC62053-23, IEC 61010, IEC 62053-31
<b>Mechanical</b>			
Dimensions (W*H*D)	96*96*41 mm	96*96*41 mm	96*96*41 mm
Weight	0.5Kg	0.5Kg	0.5Kg
Enclosure	Polycarbonate	Polycarbonate	Polycarbonate
Terminals	Plug In	Plug In	Plug In
Mounting	Panel Mounting, Din rail (Optional)	Panel Mounting, Din rail (Optional)	Panel Mounting, Din rail (Optional)
<b>Environmental</b>			
IP	IP54(front facia) ; IP 20 (at terminals)	IP54(front facia) ; IP 20 (at terminals)	IP54(front facia) ; IP 20 (at terminals)
Insulation	min 10 MOhm	min 10 MOhm	min 10 MOhm
Impulse withstand			
Operating Temp	10 to 75 deg C	10 to 75 deg C	10 to 75 deg C
Storage Temp	0 to 85 deg C	0 to 85 deg C	0 to 85 deg C
Humidity	95% RH	95% RH	95% RH
<b>Communication</b>			
Modbus	RS 485	RS 485	RS 485
Baudrate	9600 to 115200 settable	9600 to 115200 settable	9600 to 115200 settable
WIFI	IEEE 802.11 Wireless network	IEEE 802.11 Wireless network	IEEE 802.11 Wireless network
BLE (Bluetooth Low Energy)	BLE 5.0	BLE 5.0	BLE 5.0
CT/VT	Configurable through Joystick and BLE	Configurable through Joystick and BLE	Configurable through Joystick and BLE
<b>Interfaces</b>			
Analogue Input	NA	2 Numbers (0-500 ohms and 4-20mA )	2 Numbers (0-500 ohms and 4-20mA )
Digital Input	NA	2	2
Digital output	NA	2	2
Counter Input (0-1000 Hz)	NA	1 (based on DI)	1 (based on DI)
Hour Meter	NA	3 Numbers (1 voltage based, 1 current based, 1 DI based)	3 Numbers (1 voltage based, 1 current based, 1 DI based)
<b>Display</b>			
Screen	Colour TFT 3.5 inch (320*480)	Colour TFT 3.5 inch (320*480)	Colour TFT 3.5 inch (320*480)
<b>Additional Features</b>			
Transient Analysis over WIFI	NA	NA	1 sample @20 msec over WIFI R,Y,B phase voltages R,Y,B phase currents Phase wise power factor Phase wise Vthd Phase wise Ithd
Titan mobile app	Android and iOS	Android and iOS	Android and iOS

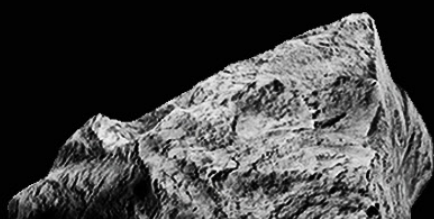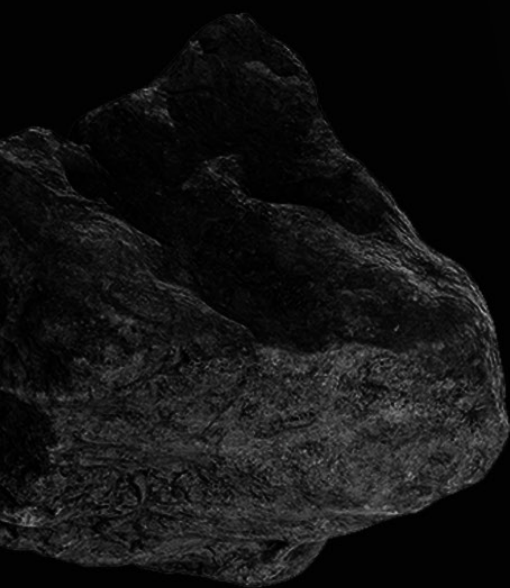




tor.ai											
Config Dashboard											
Analytics											
Total Device Count			986			Config Dashboard			Reports		
Configuration History			Total Config Library			Inline Configuration			Sent		
Batch No			Date Time			Configuration Library			Total		
S367			04-Sep-2024 17:30:24			Total			986		
S368			04-Sep-2024 17:31:16			Total			542		
S365			04-Sep-2024 16:45:53			Total			321		
S364			04-Sep-2024 16:03:26			Total			105		
S363			04-Sep-2024 15:58:43			Total			8		
From Date & To Date			03/09/2024 - 06:00:00 To 10/09/2024 - 23:59:59			Not Sent			Failed		
Devices Completed			Devices Not Sent			Devices Failed			Devices Sent		
Commands Completed			Commands Not Sent			Commands Failed			Commands Sent		
Commands Cancelled			Commands Sent			Commands Cancelled			Actions		
Showing 136 to 150 of 167 entries											

## Device provisioning system

## Device provisioning system

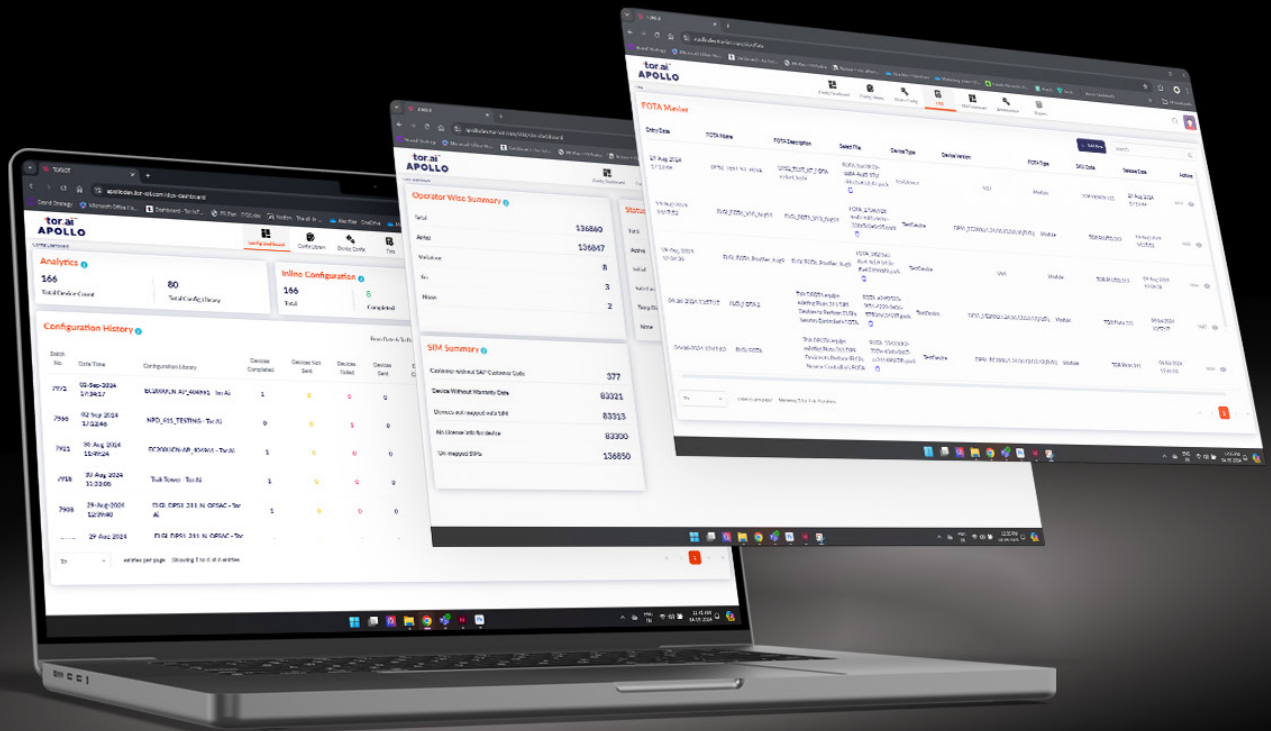





**Tor Apollo is a state-of-the-art Device Provisioning System or a configurator designed to simplify gateway configuration, intended for the use by OEMs and system integrators**



#### Device Connectivity and Configuration

Customize device settings such as network configurations, security protocols, and operational parameters according to your specific requirements



#### Gain control over all of your deployments

Monitor remotely configs to optimize device performance, troubleshoot issues, and efficiently perform routine maintenance tasks



#### Change Logs and Audit Trail

Keep track of all configuration changes with a detailed change log, providing transparency and accountability



#### Enable your infra for remote updates

Seamlessly update peripheral devices' firmware and software over the air, ensuring devices are always up-to-date with the latest features and security patches



## Contact Us

### Start your Digital Transformation Journey today

Ready to learn more about Tor and see it in action? Request a demo to know more about our capabilities.

## Tor.ai Limited

HQ - Pune

Bangalore | Delhi NCR | Dubai | Nairobi

Chennai | Ahmedabad | Kolkata | Mumbai

☎ : +91 9373467304

✉ : [contactus@tor.ai](mailto:contactus@tor.ai)

🌐 : [www.tor.ai](http://www.tor.ai)